

MADE IN TAIWAN



CÁP MẠNG

PLATINUM

PASS FLUKE TEST 80M⁺

Dây cáp mạng Golden Link Platinum là dòng sản phẩm chất lượng cao, được sản xuất tại Đài Loan, quốc gia có nền kinh tế công nghiệp phát triển và trình độ công nghệ hiện đại hàng đầu thế giới, cáp mạng Golden Link Platinum tự tin đáp ứng mọi yêu cầu kết nối, dù là khắt khe nhất.

Golden Link Platinum đã trải qua quy trình sản xuất vô cùng hiện đại và khoa học, cùng với sự kiểm soát chặt chẽ trong từng công đoạn của đội ngũ nhân công trình độ cao, giàu kinh nghiệm đến từ Đài Loan.

Khoảng cách truyền tín hiệu mạng 150M

PACKING



MADE IN TAIWAN

NETWORK CABLING PRODUCT CATALOGS

• Golden Link PLATINUM Cat6 SFTP

Part No.	AWG	Conductors	No. of Pairs	Standard Lengths**		Standard Unit Wt.		External Diameter		Jacket Thickness		Jacket Colors/Material**
				ft.	m	Lbs.	Kg	Inch	mm	Inch	mm	
TW1104-1	23	CCA	4	1000	305	22.9	10.4	0.25	6.5	0.019	0.5	Green PVC




Product Feature

- High performance of transmission.
- High quality of safety property.
- Sweep frequency up to 250 MHz.
- TIA/EIA-568-B.2
- RoHS, CE, ISO/IEC 11801 Compliant.
- Longest working distance 120M

Temperature	75°C
• Spark test	1000V DC
• AC leakage current through overall jacket	≤ 10mA (1.5KV AC)
• Cable cold bend	-20°C for 4 hr
• Conductor Resistance	≤ 12 Ω/100m
• Resistance unbalance	≤ 4%
• Dielectric strength	1.5 KV ac for 2 s
• Insulation resistance	≥ 5000 MΩ·km
• Mutual capacitance	≤ 5.6 nF/100m
• Capacitance unbalance pair-to-ground	≤ 160 pF/100m

• Golden Link PLATINUM Cat6 UTP

Part No.	AWG	Conductors	No. of Pairs	Standard Lengths**		Standard Unit Wt.		External Diameter		Jacket Thickness		Jacket Colors/Material**
				ft.	m	Lbs.	Kg	Inch	mm	Inch	mm	
TW1103-1	23	CCA	4	1000	305	18.1	8.25	0.23	6.0	0.019	0.5	Yellow PVC

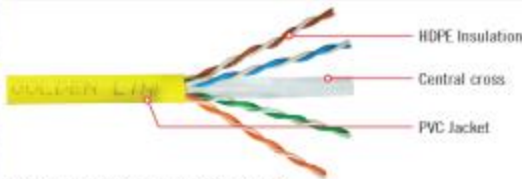


Product Feature

- High performance of transmission.
- High quality of safety property.
- Sweep frequency up to 250 MHz.
- Third party verified to TIA/EIA-568-B.2
- RoHS, CE, ISO/IEC 11801 Compliant.
- Longest working distance 160M

Temperature	75°C
• Spark test	1000V DC
• AC leakage current through overall jacket	≤ 10mA (1.5KV AC)
• Cable cold bend	-20°C for 4 hr
• Conductor Resistance	≤ 7.3 Ω/100m
• Resistance unbalance	≤ 4%
• Dielectric strength	1.5 KV ac for 2 s
• Insulation resistance	≥ 5000 MΩ·km
• Mutual capacitance	≤ 5.6 nF/100m
• Capacitance unbalance pair-to-ground	≤ 160 pF/100m

• Golden Link PLATINUM Cat5E SFTP

Part No.	AWG	Conductors	No. of Pairs	Standard Lengths**		Standard Unit Wt.		External Diameter		Jacket Thickness		Jacket Colors/Material**
				ft.	m	Lbs.	Kg	Inch	mm	Inch	mm	
TW1102-1	24	CCA	4	1000	305	18.1	8.25	0.22	5.6	0.019	0.5	Blue PVC

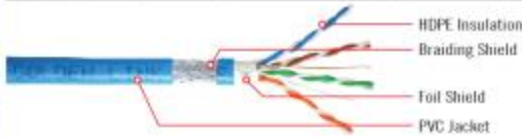


Product Feature

- High performance of transmission.
- High quality of safety property.
- Sweep frequency up to 100 MHz.
- Third party verified to TIA/EIA-568-B.2
- RoHS, CE, ISO/IEC 11801 Compliant.
- Longest working distance 120M

Temperature	75°C
• Spark test	1000V DC
• AC leakage current through overall jacket	≤ 10mA (1.5KV AC)
• Cable cold bend	-20°C for 4 hr
• Conductor Resistance	≤ 15 Ω/100m
• Resistance unbalance	≤ 4%
• Dielectric strength	1.5 KV ac for 2 s
• Insulation resistance	≥ 5000 MΩ·km
• Mutual capacitance	≤ 5.6 nF/100m
• Capacitance unbalance pair-to-ground	≤ 160 pF/100m

• Golden Link PLATINUM Cat5E UTP

Part No.	AWG	Conductors	No. of Pairs	Standard Lengths**		Standard Unit Wt.		External Diameter		Jacket Thickness		Jacket Colors/Material**
				ft.	m	Lbs.	Kg	Inch	mm	Inch	mm	
TW1101-1	24	CCA	4	1000	305	14.5	6.6	0.19	5.0	0.019	0.5	Orange PVC
TW1101-2												White PVC

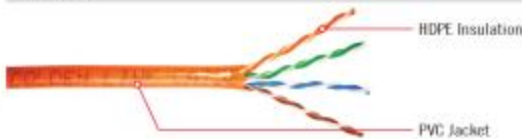

Product Feature

- High performance of transmission.
- High quality of safety property.
- Sweep frequency up to 100 MHz.
- Third party verified to TIA/EIA-568-B.2
- RoHS, CE, ISO/IEC 11801 Compliant.
- Longest working distance 160M

Temperature	75°C
• Spark test	1000V DC
• AC leakage current through overall jacket	≤ 10mA (1.5KV AC)
• Cable cold bend	-20°C for 4 hr
• Conductor Resistance	≤ 15 Ω/100m
• Resistance unbalance	≤ 4%
• Dielectric strength	1.5 KV ac for 2 s
• Insulation resistance	≥ 5000 MΩ·km
• Mutual capacitance	≤ 5.6 nF/100m
• Capacitance unbalance pair-to-ground	≤ 160 pF/100m

CÁP MẠNG PLATINUM

GIẢI PHÁP CHO HỆ THỐNG CAMERA CAO CẤP

